

Trove2SA2 (Enclosure & Backplane) / TSA2 (Backplane)

Access & Power Integration Solution for SALTO



Altronix Trove™ enclosures let you easily integrate Altronix power with SALTO CU42E0 controllers. Trove simplifies board layout and wire management, reduces installation time and labor costs.



INSPIRED ACCESS



Trove2SA2

Boards are not included

Trove2SA2 (Trove2 Enclosure + TSA2 Backplane) TSA2 (Backplane) Features

- Accommodates SALTO access controllers with or without Altronix power/accessories:
 - Salto CU42E0, CU4200 or CU4EB8 modules
 - Altronix Power Supplies
 - Altronix Sub-Assemblies
- Includes Altronix Trove2 enclosure and one (1) removable TSA2 backplane

Features

- Simplifies board layout and wire management
- Convenient knockout configuration:
 - One (1) double knockout
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit)
 - Nine (9) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Accommodates up to four (4) 12VDC/12AH batteries
- 16 AWG powder coated steel
- Includes cam lock, tamper switch and mounting hardware

Agency Listings

- UL: UL294 - Access Control System
- cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
- CE European Conformity

Physical and Environmental

Trove2SA2 - Dimensions (H x W x D):

- Enclosure: 27.25" x 21.5" x 6.5" (692mm x 546mm x 165mm)
- Shipping: 32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

Trove2SA2 - Weights (approx.):

- Product: 37.1 lb. (16.83 kg)
- Shipping: 40.85 lb. (18.53 kg)

TSA2 - Dimensions (H x W x D):

- Backplane: 25.375" x 19.375" x 0.3125" (645mm x 492mm x 8mm)
- Shipping: 26.5" x 20.5" x 1.25" (673mm x 521mm x 32mm)


TSA2 - Weights (approx.):

- Product: 8.0 lb. (3.63 kg)
- Shipping: 10.0 lb. (4.53 kg)

All registered trademarks are property of their respective owners.

Access Controller Position Chart for the Following Models:

Altronix / SALTO	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, Tango1B, ACM8, ACM8CB, ACMS8, ACMS8CB, ACMS12, ACMS12CB, LINQ8ACM, LINQ8ACMCB	(A)
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, PDS16, PDS16CB, VR6	(B)
CU42E0, CU4200, CU4EB8	(C)

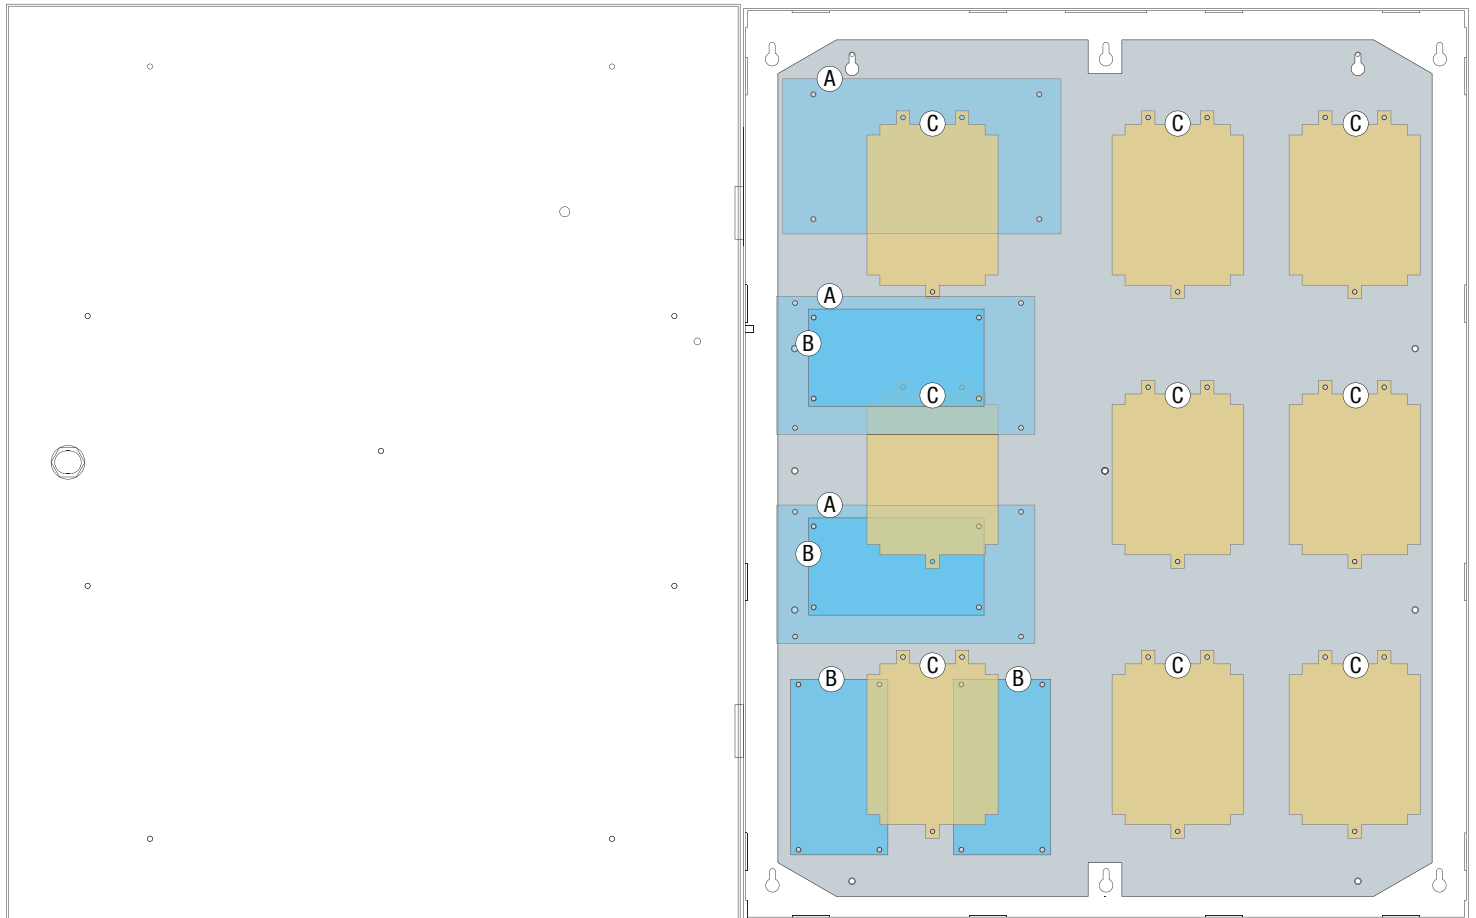

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

